

DECKING

Residential & Light commercial

TWO COLORS AVAILABLE



Available in two colors, Classic Espresso and Epic Cognac, with Structural End-Matched.

Proven Installation System

Dimensionally Stable

Sustainable

Reversible

Toll Free: (855) 774-0002



dassoXTR is an extremely durable bamboo product designed specifically for outdoor applications.

It is made of 87% of natural bamboo fiber and 13% Phenolic resin fused into dense and durable panels that are milled for bamboo decking, RainClad siding, porch flooring, lumber, and panels. Worldwide accepted for outdoor use, Class A Fire-rated using C NFPA and IBC Classifications tested to ASTM E-84-12 decay, and insect resistant (including resistance to termites). Tested in accordance with International Code Council (ICC) standard AC174 for exterior decking, dassoXTR has been approved as a product suitable for exterior usage.

Visit www.dassoXTR.com for more info.

DESIGN FEATURES

Look and feel of natural Wood and not plastic. Performs like dense tropical hardwoods. Cuts with standard woodworking tools.


TECHNICAL HIGHLIGHTS

Class A - rated, W.U.I. compliant. Pre-Oiled with Woca Oil. More durable than IPE!

REVERSIBLE


It can be installed smooth or reeded face up.

1x6 inch Residential G1



Started/End plank, grooved on one side and flush on the other long side.

1x6 inch Residential G2



Standard, 2 sides grooved. One on each of the long sides of the plank meant for attaching fasteners.

PANDA CLAW

Eisen Panda Claw (3/16" GAP)

Gaps between deck rows differ base on type of fastener. This space is necessary to allow driver to reach screwhead.



BENEFITS

Dimensionally stable, easy to transport, Zero-VOC, cuts like wood, no twist or warp.

NO LEACHING No preservative is sip out from the material to contaminate water source under wet environment.

NO VOC 3rd Party Certified Low-VOC products emit less than .005 PPM (parts per million) volatile organic compound chemicals. dassoXTR is Zero-VOC

Safe for interior usage as well, No Urea-formaldehyde or toxic chemical

No ACQ and CCA used in dassoXTR. These preservative chemical are poisonous to living organism including mammals.

Not from trees. Good alternative to wood fiber. Options to wood fiber includes bamboo, palm, and cork.

dassoXTR
Fused Bamboo® for Exterior Use

PATENTED:

CHINA, RUSSIA, AUSTRALIA, USA, EU, MALAYSIA, SINGAPORE

dassoXTR Fused Bamboo for Exterior Use®

Made by using a patented process and was introduced by the dasso Group in 2010.

The dasso Group, based in Hangzhou, China, has been the world's leader in innovative bamboo products for more than three decades. With 10 manufacturing facilities, over 1,000 employees, a Design and Research Center and over 40 patents to date, dasso's mission is to advance the innovative use of bamboo throughout the world.

Technical Specifications

dassoXTR Bamboo Decking is the superior choice for natural decking. Our bamboo deck planks are precision end-matched to attach seamlessly together. The bamboo deck planks come in 2 different profiles called G2 Deck Plank (XTR-DK20-G2-PP and EPC-DK20-G2-PP) and G1 Starter/End Plank (XTR-DK20-G1-PP and EPC-DK20-G1-PP). The G1 Starter/End Plank is also used as stair treads and risers. decking.

ESPRESSO XTR-DK20-G1/G2-PP




THICKNESS	WIDTH	LENGTH	EDGES	ENDS	PRIMED WITH
3/4+" (20mm)	5 3/8+" (137mm)	72" (1829mm)	G1	T&G	Woca Oil
3/4+" (20mm)	5 3/8+" (137mm)	72" (1829mm)	G2	T&G	Woca Oil

COGNAC EPC-DK20-G1/G2-PP



THICKNESS	WIDTH	LENGTH	EDGES	ENDS	PRIMED WITH
3/4+" (20mm)	5 3/8+" (137mm)	72" (1829mm)	G1	T&G	Woca Oil
3/4+" (20mm)	5 3/8+" (137mm)	72" (1829mm)	G2	T&G	Woca Oil


Installation System

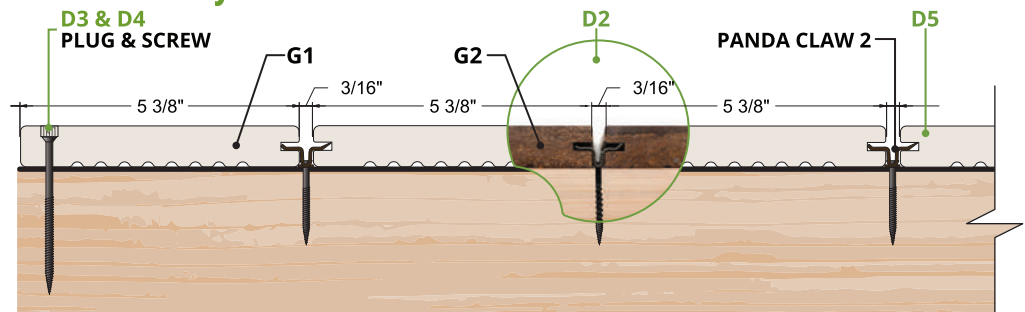

SECTION VIEW

Accessories & Finishes

END-MATCHED Perfect joint | **PANDA CLAW** Standard fastener | **COUNTERSINK DRILL** Drill & Screw | **PLUG SYSTEM** Chisel off | **ANCHOR SEAL** Seal cut

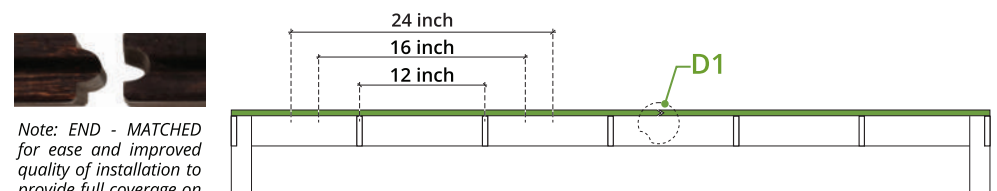

Note: END - MATCHED for ease and improved quality of installation to provide full coverage on or off the joist.

SECTION VIEW

Installation Benefits

Pre-oiled for immediate use. Hidden fastening. End- Matched for installation on or off joist (12"/16"/24" on centers). All dassoXTR products are 6 ft long, easy to transport, less cutting, speedier installation (30% faster).