


SIDING

Miami-Dade County Product Control Approved

TWO COLORS AVAILABLE



Available in two colors, Classic Espresso and Epic Cognac, with Structural End-Matched.

Sustainable
Innovative
Dimensionally Stable
Proven Installation System

Toll Free: (855) 774-0002



dassoXTR is an extremely durable bamboo product designed specifically for outdoor applications.

It is made of 87% of natural bamboo fiber and 13% Phenolic resin fused into dense and durable panels that are milled for bamboo decking, RainClad siding, porch flooring, lumber, and panels. Worldwide accepted for outdoor use, Class A Fire-rated using C NFPA and IBC Classifications tested to ASTM E-84-12 decay, and insect resistant (including resistance to termites). Tested in accordance with International Code Council (ICC) standard AC174 for exterior decking, dassoXTR has been approved as a product suitable for exterior usage.

Visit www.dassoXTR.com for more info.


DESIGN FEATURES

Look and feel of natural Wood and not plastic. Performs like dense tropical hardwoods.

TECHNICAL HIGHLIGHTS


Class A - rated, W.U.I. compliant. Pre-Oiled with Woca Oil. More durable than IPE!

1x6 inch RainClad Siding



Cross Section View

1x8 inch RainClad Siding



Cross Section View

Siding can be installed in horizontal or vertical direction.



Batten Clip (1/4" Air Gap)

With One (1) hole to use with or without FasTrac.

Sheathing Clip (3/4" Air Gap)

With One (1) hole to use with or without FasTrac.



BENEFITS

Dimensionally stable, easy to transport, Zero-VOC, cuts like wood, no twist or warp.



No preservative is leached out from the material to contaminate water source under wet environment.



3rd Party Certified Low-VOC products emit less than .005 PPM (parts per million) volatile organic compound chemicals. dassoXTR is Zero-VOC



Safe for interior usage as well, No Urea-formaldehyde or toxic chemical



No ACQ and CCA used in dassoXTR. These preservative chemical are poisonous to living organism including mammals.



Not from trees. Good alternative to wood fiber. Options to wood fiber includes bamboo, palm, and cork.

dassoXTR
Fused Bamboo® for Exterior Use

PATENTED:

CHINA, RUSSIA, AUSTRALIA, USA, EU, MALAYSIA, SINGAPORE

dassoXTR Fused Bamboo for Exterior Use®

Made by using a patented process and was introduced by the dasso Group in 2010.

The dasso Group, based in Hangzhou, China, has been the world's leader in innovative bamboo products for more than three decades. With 10 manufacturing facilities, over 1,000 employees, a Design and Research Center and over 40 patents to date, dasso's mission is to advance the innovative use of bamboo throughout the world.

Technical Specifications

dassoXTR Shiplap Siding is the great choice for residential or commercial RainClad. In terms of plank width, you have the option of nominal size 1x8 or 1x6. Our siding planks are 6 feet long with a shiplap profile on the long side and T&G End-match on the end for an endless joint installation. When installed with the designed fastener, either sheathing or batten, the fastener will allow the planks to overlap on top of the other planks for a clean elegant look.

ESPRESSO XTR-SID18-137/178TG-PP


	THICKNESS	WIDTH	LENGTH	ENDS	PRIMED WITH
1x6	3/4" (18 mm)	5-3/8" (137 mm)	72" (1829 mm)	T&G	Woca Oil
1x8	3/4" (18 mm)	7" (178 mm)	72" (1829 mm)	T&G	Woca Oil

COGNAC EPC-SID18-137/178TG-PP


	THICKNESS	WIDTH	LENGTH	ENDS	PRIMED WITH
1x6	3/4" (18 mm)	5-3/8" (137 mm)	72" (1829 mm)	T&G	Woca Oil
1x8	3/4" (18 mm)	7" (178 mm)	72" (1829 mm)	T&G	Woca Oil

Horizontal Installation System

Batten Clip 1x6

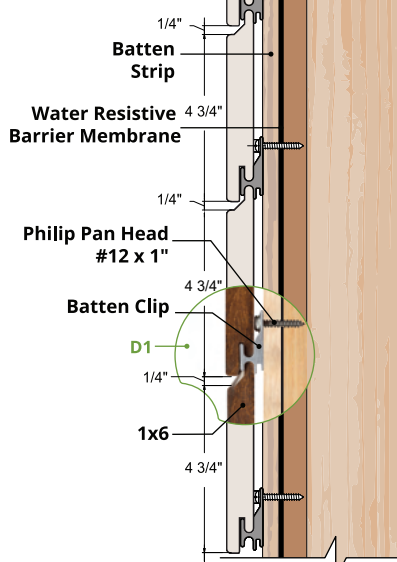


Sheathing Clip 1x8

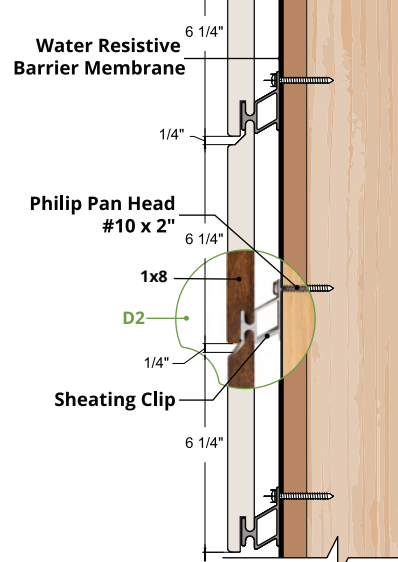

SIDING SECTION




Note: END - MATCHED for ease and improved quality of installation to provide full coverage on or off the stud.

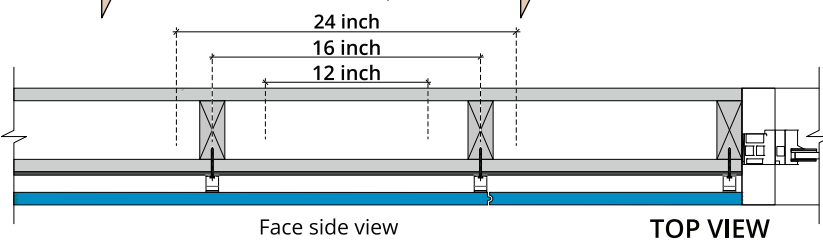

Accessories

BATTEN CLIP Standard fastener



D1

SHEATHING CLIP Standard fastener



D2

Installation Benefits

Pre-oiled for immediate use. Hidden fastening. End-Matched for installation on or off stud (12"/16"/24" on centers). All dassoXTR products are 6 ft long, easy to transport, less cutting, speedier installation (30% faster).